

Rlux

COMMERCIAL LIGHTING


CLARA

BACK-LIT LED PANEL LIGHT 1' X 4'



www.rlux.in


AVAILABLE WITH CCT & POWER TUNABLE OPTIONS



PRODUCT DESCRIPTION

The RLUX Clara high efficacy back-lit LED panel light is designed to offer a superior efficacy of 140 lm/W. It is an excellent alternative to the traditional fluorescent troffers. The thin and light-weight back-lit design easily lays into drop ceilings. This LED and flat panel combination provides an energy efficient luminescence (up to 75% savings over traditional fluorescent lights) with no shadows or dark spots and meets the higher performance DLC classification.

PHYSICAL PARAMETERS

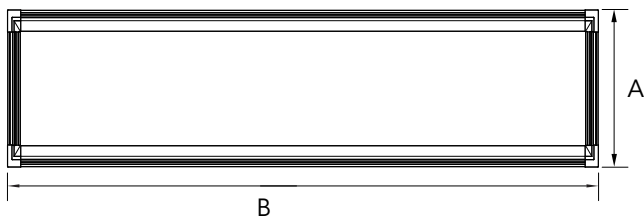

Wattage	A (ft)	B (ft)
20 W - 40 W	1	4

PRODUCT FEATURES

- Ultra Slim body.
- 140 lm/W, DLC Premium.
- UGR <19 Flicker free.
- UV Treated PS diffuser for Anti yellowing with time.
- Inputs voltage range : 110 -277 V, 50-60Hz.
- CCT : 3000K to 5700K, Dimming optional.
- Foldable edge design, no light leakage and better dust proofing.
- CCT & Power Tunable options available.

ORDERING INFORMATION

Part Number	Fixture Type	Dimming	Wattage	CCT	Voltage	CRI	Internal
7	XX	X	XXXXW	CC	L	XX	Y

SERIES CODE


Model Number	Wattage	CCT Optional	CRI	Efficacy	Diffuser Type
703D0020WCCLXXY	20 W	3000 K - 5700 K	80+	140 lm/W	Clear / Frosted
703D0030WCCLXXY	30 W	3000 K - 5700 K	80+	140 lm/W	Clear / Frosted
703D0040WCCLXXY	40 W	3000 K - 5700 K	80+	140 lm/W	Clear / Frosted

FIXTURE DETAILS


Size	1' x 4'			1' x 4'		
CCT & Power	Fixed			Tunable		
Efficacy	140 lm/W					
Wattage	20 W	30 W	40 W	20 W	30 W	40 W
Lumen Output	2800 lm	4200 lm	5600 lm	2800 lm	4200 lm	5600 lm
LED Brand and Package	BRIDGELUX / CREE 2835, 1 W					
Operating Temperature	-14° F to +113° F					
Number of LEDs	48	48	48	96	96	96
IP Rating	IP20					
Power Factor	> 0.95					

OPTOMETRIC DATA


20 W

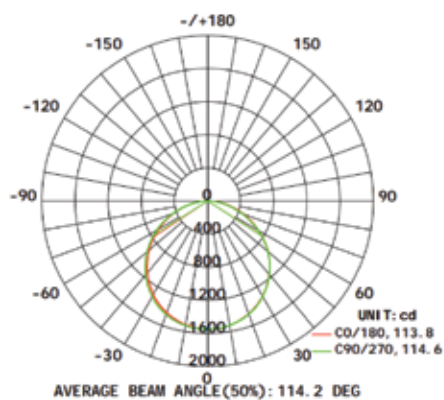

30 W

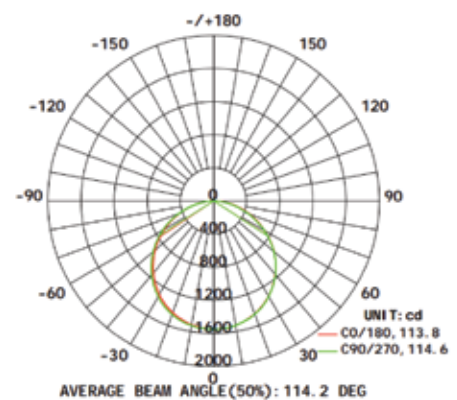


40 W

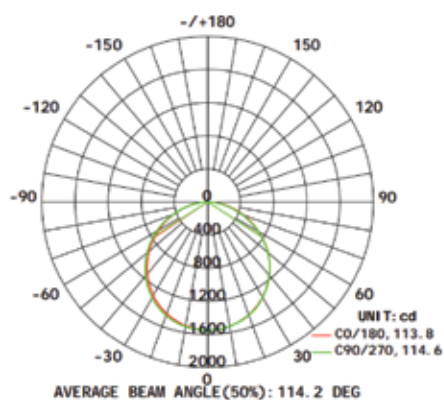


MOUNTING OPTIONS

A. Hanging / Suspension Mount

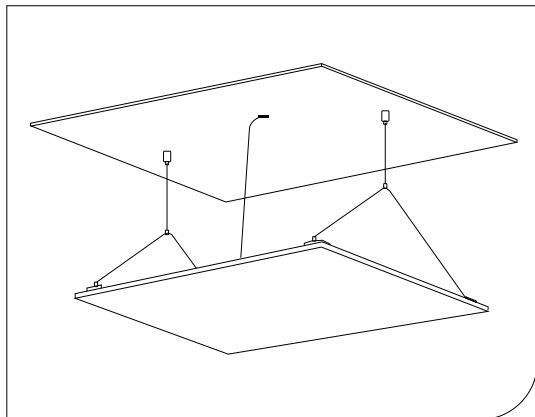

B. Embedded Mount by Spring clip

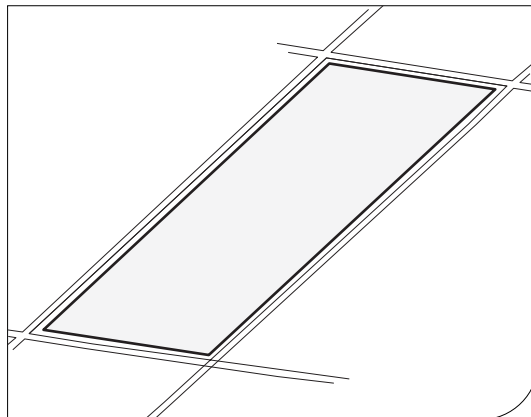

INSTALLATION

A. Hanging / Suspension Mount

1. Lock the lockparts of the wire rope branching to the back panel light. (Figure 1)
2. Lock the hanging part of the wire rope to the ceiling. (Figure 2)
3. Lock the lockpart of the main wire rope to the wire rope hanger, connect with the power cable. (Figure 3)
4. Finish installation, power on working. (Figure 4)




Figure 1




Figure 2




Figure 3




Figure 4

B. Embedded Mount by Spring clip

1. Make sure the POWER IS TURNED OFF at the source to the location at which you are installing the product.
2. Remove existing panel if applicable.
3. Before installing the panel in the ceiling, pull up the safety hooks on the back of the luminaire. (Figure 1)
4. Insert the panel into the ceiling so it rests securely on the T-grid, Bend each safety hook 90 degree so they extend over the T-grid on both sides of the fixture. (Figure 2)

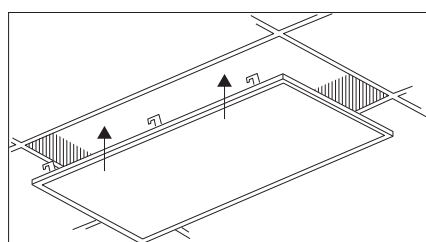


Figure 1




Figure 2

APPLICATION AREAS



SCHOOLS



OFFICES



HOSPITALS



AUDITORIUMS



DINING AREA



DISCUSSION ROOMS