

**DLC Part Number#: 304Y0300W50LBX**
**SKU NUMBER#: 662187526133**

# ALTERF LED LINEAR HIGHBAY 300 W

**POWER: 300 W | CCT: 5000 K**


## Product Description:

The RLUX ALTERF LED LINEAR High Bay is designed for a variety of applications and mounting heights. Wide angle optics, multiple lumen packages and color temperatures make it ideal for industrial, commercial, manufacturing, gymnasium and other applications, that utilize traditional linear fluorescent and HID fixtures. Suggested mounting heights are between 15-25 feet. This high bay reduces up to 70% of the energy usage and has a life span of over 10 years. This fixture is available in a frosted or clear.

## Features:

- 1, 00, 000 hours of lifetime.
- Superior heat dissipation capability due to use of multiple heat sinks.
- Smooth and uniform light output with no flickering or humming.
- Sleek design and Low-profile makes it suitable for a wide range of applications.
- Savings of up to 75% over conventional fluorescent fixtures.
- Resistant to vibration and water.
- Inputs voltage range: 100-277V / 200-480V, 50-60 Hz.

## Ordering Information

Part Number	Fixture Type	Dimming	Wattage	CCT	Voltage	CRI	Internal
3	XX	D	yyyyW	C	L	X	BX

### Series Code

Model Number	Wattage	CCT Optional	CRI	Efficacy	Diffuser Type
304Y0300W50LBX	300 W	5000 K	80+	147.1 lm/W	Clear / Frosted

## Fixture Details

### Electrical

Power	300 W
Voltage	100-277 V
Current	2.5384 A
Power Factor	> 0.95
Total Harmonic Distortion (THD)	5.98%
Surge Protection	5kV

### Lighting Performance

Lumens	44130 lm
Efficacy	147.1 lm/W
Color Temperature (CCT)	5000 K
Color Rendering (CRI)	80+
Beam Angle	88.7°
Light Distribution	Type VS
Dimmable Lighting Control	0-10V, Range 10% - 100%

### Construction

Housing	Aluminum
Base / Power Supply	Hard Wired
Finish	White
Heat Sink Type	Aluminum
Optics Material / Lens	Clear / Frosted
Diffuser	Clear / Frosted
Number of LEDs	1768

### Components

LED Light Source	Bridgelux 2835, 0.5 W
Driver	MOSO

### Environment

Operating Temperature	-10° F ~ 120° F
Ingress Protection Rating (IP)	IP40

**Fixture Dimension**

Length (inches)	43.30"
Width (inches)	9.88"
Height (inches)	1.87"
Net Weight (lbs)	15
Gross Weight (lbs)	17.52

**Packaging Dimension**

Box Dimensions (inches)	45.07" x 12.20" x 3.93"
Box Weight (lbs)	2.10
Quantity Per Box	1

**LifeSpan**

Average Life (Hours)	100000
Warranty (Years)	5

**Qualifications**



Model Number	304Y0300W50LBX
SKU Number	662187526133



DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

**Optometric Data**

300 W

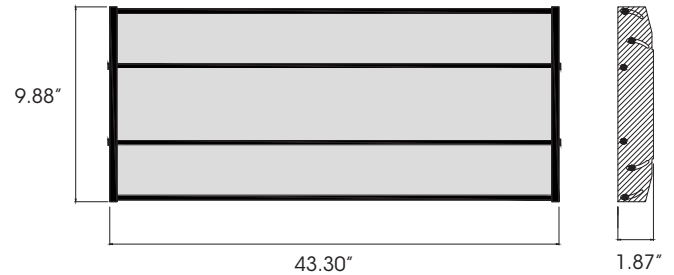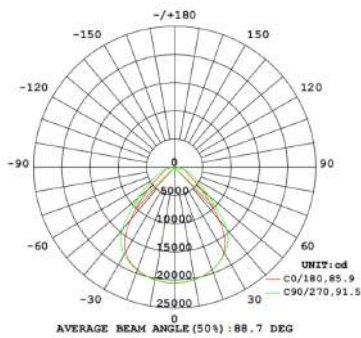

Wattage	CCT (Kelvin - K)	Efficacy (lm/W)	Lumen Output
<b>300 W</b>	5000 K	147.1	44130

**Mounting Brackets**

662187525259	Surface Mount Kit	1
--------------	-------------------	---

**Mounting Brackets**

662187525723	Microwave (PIR) Sensor	1
--------------	------------------------	---