



www.rlux.in

PRODUCT **PRESENTATION**

Your Trusted **OEM / ODM** Partner Based In India



COMMERCIAL LIGHTING



INDUSTRIAL LIGHTING

MAKE IN INDIA



Noma Series T8 LED Tube Type-B




Clara & Luma Series LED Back-lit Panel



Delphinus Series LED Troffers



Astra Series LED Linear Low Bay Strip Light




Alterf & Alina Series High Bays



TABLE OF CONTENTS:-

Stella & Voilla Series LED Area Lights




Orius & Centaurus Series High Bays



Lepus Series LED Wall Packs



Canopious Series LED Canopy Light



Vigorous Series LED Sports Light



NOMA SERIES

T8 LED TUBE LIGHT

TYPE-B

Wattage Range: 10W/12W/15W
18W/22W



FEATURES

- 150 lm/W, DLC 5.1 Listed.
- Input voltage range: 120-277 V, 50/60 Hz.
- Overpower, short and open circuit protected.
- Double ended construction. Can be wired single ended.
- Reduces energy consumption by up to 60%.
- LED tube light with superior aesthetic & heat dissipation capability.
- Green Eco Friendly: no flickering, no UV light, no buzzing ballast, no hazardous materials.



150 lm/W



IP20
Protected



75% Power
Savings



Intertek



RoHS
Compliant



5 Year
Warranty



CLARA SERIES

BACK-LIT LED PANEL LIGHTS 2x2 | 1x4 | 2x4

CCT & POWER TUNABLE OPTIONS

Wattage Range: 20W/30W/40W/50W



FEATURES

- UGR<19 Flicker Free.
- CCT : 3500K - 5000K, Dimming Options Available.
- UV Treated PC Diffuser for Anti Yellowing with time.
- CCT & Power Tunable options available.
- Input Voltage Range: 110-277V, 50/60Hz.

ACCESSORIES

- Surface Mounting Kit
- Sensor
- EM Driver



140 lm/W



IP20
Protected



Flicker Free



Wattage
Tunable



CCT
Tunable




Sensor



Intertek



5 Year
Warranty

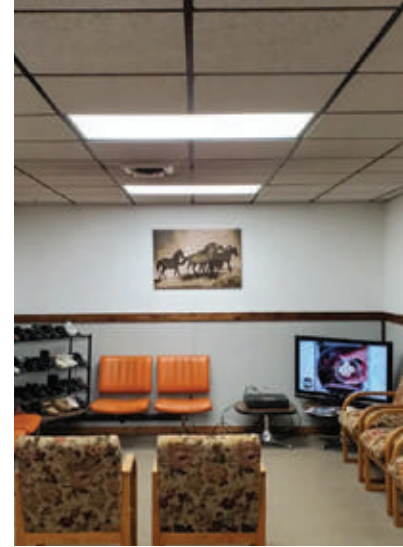

LUMA SERIES

LED BACK-LIT PANEL LIGHTS 2x2 | 1x4 | 2x4

CCT & POWER TUNABLE OPTIONS

Wattage Range: 20W/30W/40W/50W



FEATURES

- UGR<19 Flicker Free.
- CCT : 3500K - 5000K, Dimming Options Available.
- UV Treated PC Diffuser for Anti Yellowing with time.
- CCT & Power Tunable options available.
- Input Voltage Range: 110-277V, 50/60Hz.

ACCESSORIES

- Surface Mounting Kit
- Sensor
- EM Driver



125 lm/W



IP20
Protected



Flicker Free



Wattage
Tunable



CCT
Tunable



Sensor



Intertek



5 Year
Warranty



ASTRA SERIES LED LINEAR LOW BAY STRIP LIGHT

CCT & POWER TUNABLE OPTIONS

Wattage Range: 20W/30W/40W/50W



FEATURES

- Switchable Wattage and Switchable CCT technology.
- High Efficacy meeting DLC Premium requirements.
- Quick release design for easy installation.
- Frosted polycarbonate lens for uniform light distribution.
- Sensor options available.
- Can be surface mounted on ceilings or walls, or suspended via chain, pendants or cables.

ACCESSORIES

- Surface Mounting Kit
- Sensor



140 lm/W



IP20
Protected



Flicker Free



Wattage
Tunable



CCT
Tunable




Sensor



Intertek



5 Year
Warranty

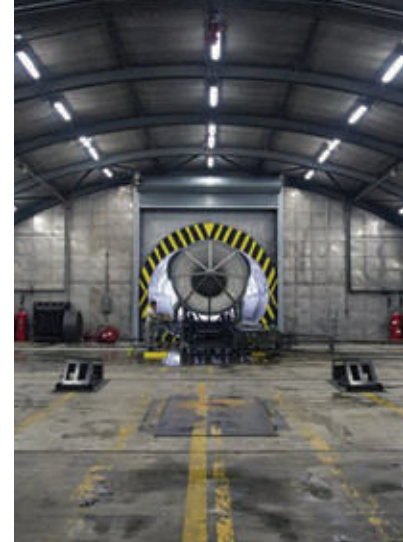

DELPHINUS SERIES

LED TROFFERS

2X2 | 2X4

CCT & POWER TUNABLE OPTIONS

Wattage Range: 20W/30W/40W/50W



FEATURES

- Flicker Free.
- CCT : 3500K - 5000K, Dimming Options Available.
- UV Treated PC Diffuser for Anti Yellowing with time.
- CCT & Power Tunable options available.
- Input Voltage Range: 110-277V, 50/60Hz.

ACCESSORIES

- Surface Mounting Kit
- Sensor
- EM Driver



130 lm/W



IP20
Protected



Flicker Free



Wattage
Tunable



CCT
Tunable



Sensor



Intertek



5 Year
Warranty



ALTERF SERIES

LED LINEAR HIGH BAYS



**Wattage Range: 75W/100W/150W/200W (2ft)
240W/300W (3ft), 400W (4ft)**

FEATURES

- 1,00,000 hours of lifetime.
- Sensor options available.
- Sleek design and Low-profile makes it suitable for a wide range of applications.
- Inputs voltage range : 100-277 V / 200-480 V, 50/60Hz.
- Resistant to vibration and water.

ACCESSORIES

- Surface Mounting Kit
- Sensor
- Wire Guard
- EM Driver



150 lm/W



IP40
Protected



0-10V
Dimming



Voltage Range
100-277V,
200-480V



Wattage
Tunable




Sensor



Intertek



5 Year
Warranty

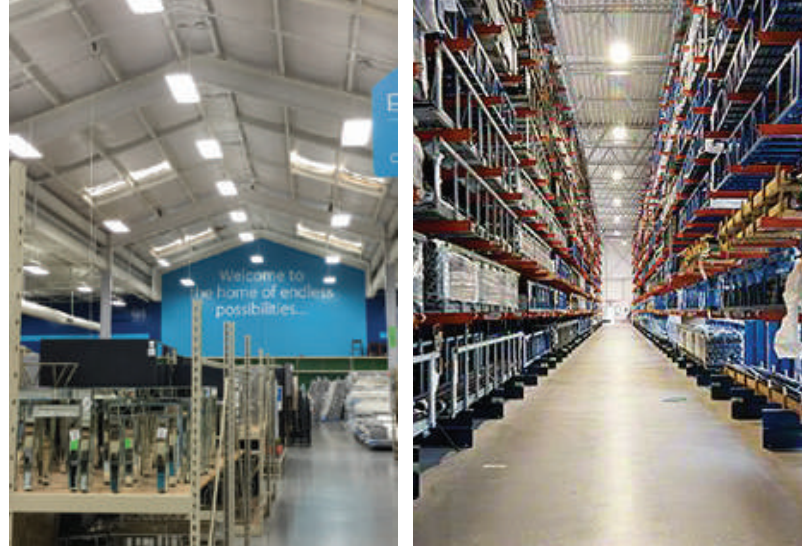

ALINA SERIES

LED LINEAR HIGH BAYS

CCT & POWER TUNABLE OPTIONS

Wattage Range: 100W/150W/200W/240W (2ft)
300W (3ft)



FEATURES

- 1,00,000 hours of lifetime.
- Sensor options available.
- Sleek design and Low-profile makes it suitable for a wide range of applications.
- Inputs voltage range : 100-277 V / 200-480 V, 50/60Hz.
- Resistant to vibration and water.
- Available with CCT & Power Tunable Options.

ACCESSORIES

- Surface Mounting Kit
- Sensor
- Wire Guard
- EM Driver



140 lm/W



IP40
Protected



0-10V
Dimming



Voltage Range
100-277V,
200-480V



Wattage
Tunable



CCT
Tunable



Sensor



Intertek



5 Year
Warranty



STELLA SERIES LED AREA LIGHTS/ SHOEBOXES

Wattage Range: 100W/150W/185W/200W/
240W/300W/400W/500W



FEATURES

- Made from prime grade aluminum alloy.
- Dimming, sensor and various optics options available.
- Low voltage range: 100-277V, 50/60Hz.
- High voltage range: 277-480V, 50/60Hz.
- Power tunable options available.

ACCESSORIES

- Slip Fitter
- Square & Round
- Trunion Fitter
- Sensor
- Shield



150 lm/W



IP66
Protected



0-10V
Dimming



Voltage Range
100-277V,
277-480V



Wattage
Tunable



Sensor



Optics
Option



Intertek



5 Year
Warranty




VOILLA SERIES LED AREA LIGHTS

CCT & POWER TUNABLE OPTIONS

Wattage Range: 60/80/100W, 80/120/150W

100/150/185W, 150/200/240W, 185/240/300W

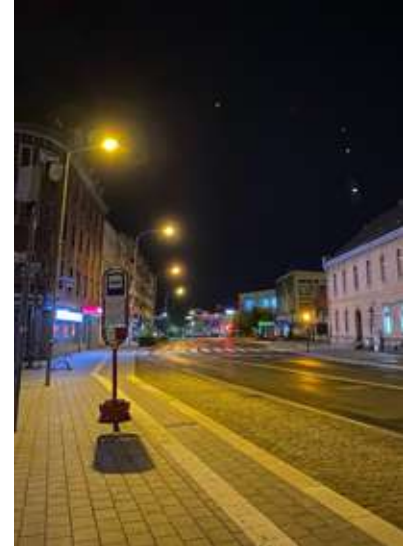

FEATURES

- Made from prime grade aluminum alloy.
- Dimming, sensor and various optics options available.
- Low voltage range: 100-277V, 50/60Hz.
- High voltage range: 277-480V, 50/60Hz.
- Power tunable options available.

ACCESSORIES

- Slip Fitter
- Square & Round
- Trunion Fitter
- Sensor
- Shield



140 lm/W



IP65
Protected



0-10V
Dimming



Voltage Range
100-277V,
277-480V



Wattage
Tunable



Sensor



Optics
Option



Intertek



5 Year
Warranty



ORIOUS SERIES

LED UFO HIGH BAYS

Wattage Range: 100W/150W/200W
240W



FEATURES

- Moisture and Dust Resistant.
- Dimming and sensor options available.
- Wide beam angle & uniform light distribution.
- Savings of up to 75% over conventional fluorescent fixtures.
- Inputs voltage range : 100-277 V / 200-480 V, 50/60Hz.
- Resistant to vibration and splash.



140 lm/W



IP66
Protected



0-10V
Dimming



Voltage Range
100-277V,
200-480V



Wattage
Tunable



Intertek



5 Year
Warranty



IK08
Protection

ACCESSORIES

- Eye Bolt
- Hook
- Chain Mount



CENTAURUS SERIES

LED UFO HIGH BAYS



CCT & WATTAGE TUNABLE OPTIONS

Wattage Range: 60/80/100W, 80/120/150W

120/150/200W, 150/200/240W

FEATURES

- Moisture and Dust Resistant.
- Dimming and sensor options available.
- Wide beam angle & uniform light distribution.
- Savings of up to 75% over conventional fluorescent fixtures.
- Inputs voltage range : 100-277 V / 200-480 V, 50/60Hz.
- Resistant to vibration and splash.
- Available with CCT & Wattage Tunable Options.

ACCESSORIES

- Eye Bolt
- Chain Mounting
- Hook
- Sensor



140 lm/W



IP65
Protected



0-10V
Dimming



Voltage Range
100-277V,
200-480V



Wattage
Tunable



CCT
Tunable



Sensor



Intertek



5 Year
Warranty



IK08
Protection



LEPUS SERIES

LED WALL PACKS

SEMI CUT-OFF

Wattage Range: 48W/60W/80W/100W/130W



FEATURES

- Moisture and Dust Resistant.
- Sensor options available.
- Sleek and modern aesthetics combined with a rugged construction.
- Inputs voltage range : 120-277 V, 50/60Hz.
- Resistant to vibration and water.



130 lm/W



IP65
Protected



0-10V
Dimming



Wattage
Tunable



Sensor



Intertek



5 Year
Warranty


ACCESSORIES

- Photocell Sensor Options
- Motion Sensor Options



LEPUS SERIES LED WALL PACKS FULL CUT-OFF

Wattage Range: 48W/60W/80W/100W

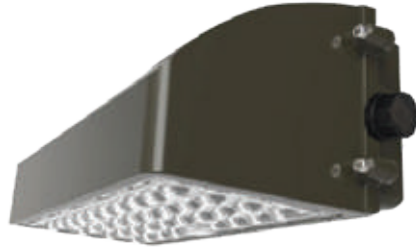

FEATURES

- Moisture and Dust Resistant.
- Sensor options available.
- Sleek and modern aesthetics combined with a rugged construction.
- Inputs voltage range : 120-277 V, 50/60Hz.
- Resistant to vibration and water.



130 lm/W



IP65
Protected



0-10V
Dimming



Wattage
Tunable



Sensor



Intertek



5 Year
Warranty

ACCESSORIES

- Photocell Sensor Options
- Motion Sensor Options



CANOPIOUS SERIES LED CANOPY LIGHT

Wattage Range: 35W/60W/75W/100W/120W



FEATURES

- Low-profile, stylish design with durable powder coat finish.
- Suitable for ambient operating temperature.
- Comes with dimming capability (0-10 V).
- Surge-protected and IP65 rated for wet locations.
- System rated for long 50,000 hour life.

ACCESSORIES

- Sensor



130 lm/W



IP65
Protected



0-10V
Dimming



75% Power
Savings



RoHS
Compliant



Intertek



5 Year
Warranty



VIGOROUS SERIES LED SPORTS LIGHT

Wattage Range: 300W/400W/500W/600W



FEATURES

- Exceptional efficacy (150 lm/W).
- Less electrical interference due to high-quality chip.
- Solid and rugged construction.
- IP66 rated ensuring protection against external factors.
- 240° adjustable angle.
- Excellent heat management system courtesy of multiple vents.

ACCESSORIES

- Shield
- Laser Aiming Device
- Wireless Control System



150 lm/W



IP66
Protected



0-10V
Dimming



Voltage Range
100-277V,
277-480V




Wattage
Tunable



Intertek




5 Year
Warranty

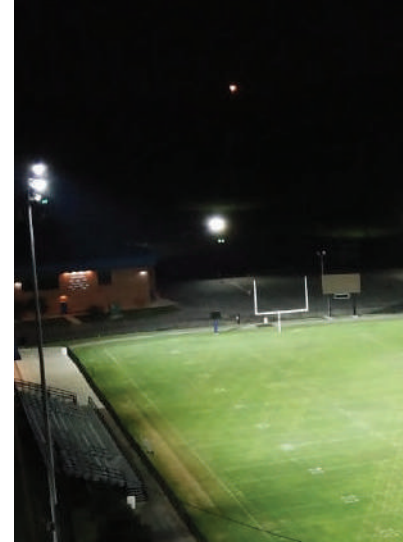

OEM/ODM PRODUCTS

Rlux manufactures products for many of the renowned brands globally. Some of the fast moving **OEM Products** are as below.


OEM PRODUCTS



Dome Lights



Under Cabinet Lights




Downlights




Solar Controller




Regulators, Switches



Switch Plates

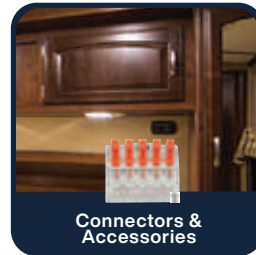


Connectors & Accessories

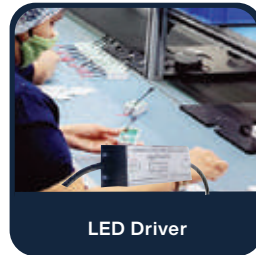

LED Driver



Mini Markers

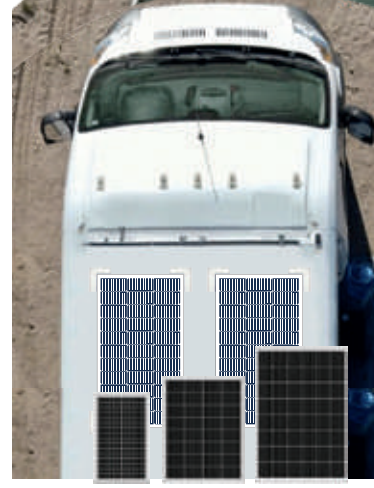

Solar Panels



ABS Pipes



ROYALUX EXPORTS PVT LTD

150-B, Noida Special Economic Zone, Noida,
Phase-II, Uttar Pradesh - 201305, India

Email: info@rlux.in

Website: www.rlux.in

Telephone: +1 317-853-9650

